

## E Series

# KWO65-66-E


65" 2500nits 4K Fully Outdoor Digital Signage



IP Rating



High Brightness



Ultra Thin



Four Seasons




Horizontal & vertical



Tempered Glass

Keewin Display offers a premium outdoor digital signage solution with a high-brightness LCD display, integrated high-temperature LCD, self-cooling design, and AG coating glass for enhanced visibility. This signage is easy to integrate into custom frames and doesn't require additional waterproofing or cooling measures, making it an excellent choice for outdoor advertising needs.

## INSTALLATION METHOD

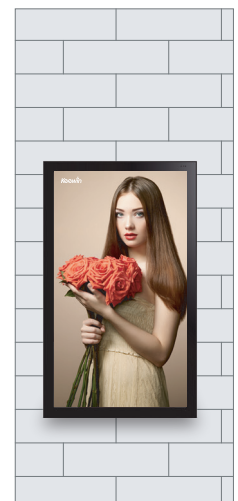

# Technical Specifications

## LCD Display

Size	65
Active Display Area ( H x V mm )	1428.48 x 803.52
Resolution	3840 x 2160
Brightness	2500 nits
Aspect Ratio	16 : 9
Backlight Adjustment	Automatic (Ambient Light Sensor)
Viewing Angle	178°/178°
Backlight Configuration	Direct LED
Operation Life (hours)	50,000

## Mechanical

Enclosure Material	Aluminum
Finishing	Zinc Powder Coating + Fine Grain Powder Coating
Colour	Black (Ral 9005)
Glass	AG Coating Tempered Glass, Back Painted Pantone Black C

## Power

AC Input	110~220VAC±10% , 50 / 60 Hz
Power Consumption	425w

## Environment

IP Rating	IP66
Operating Environment	Fully Outdoor
Operating Temperature	-20°C~50°C ( Outdoor , direct sunlight 1000W/m2 )
Operating Humidity	5%~98%
Operating Altitude	≤ 2000m



## Media

( HDMI In ) Standard

HDMI Input	HDMI ( x 1 ), 480i, 480p, 720p, 1080i , 1080p , 2160p
Analog Audio Output	3.5mm Headphone Jack (x1)

## Mechanical

W x H x D	900 x 1524 x 104 mm
Net Weight	64kg

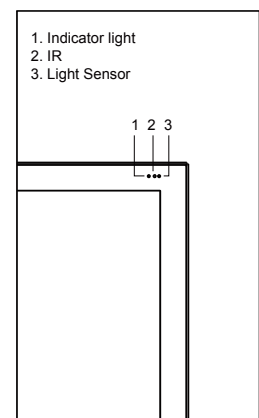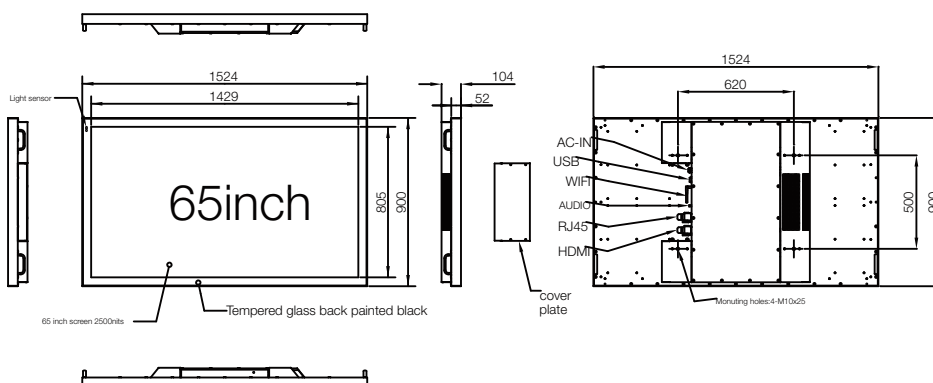

IR Detail View

## Certificate

CE-EMC  
CE-LVD  
ROHS  
IP66

## Optional

Touch  
Android  
Computer  
Camera  
NFC  
RFID  
Ultrasonic sensor